

Discera 6

selux




Project: _____

Type: _____ **Qty:** _____

DSC6	R3								
Series	Optics	Mounting	Lamping	Lamp Color	Power Cord Length	Finish	Voltage	Options	
								Pole Series	Height
									Finish
									Options

Series	Optics	Mounting	Lamping	Lamp Color	Power Cord Length	Finish	Voltage	Options
DSC6 Discera 6	R3 Type III Distribution	S1 Single Short Arm S2 Double Short Arm @180° L1 Single Long Arm L2 Double Long Arm @180° LW Long Arm Wall Mount	Metal Halide H070T6 70W T6 H100T6³ 100W T6 H150T6 150W T6 H070 70W ED17 H100 100W ED17 H150 150W ED17	Metal Halide 830 940² 942	12 15 18 20 25 XX¹	WH White BK Black BZ Bronze SV Silver SP Specify Premium Color	120 208 277 347	PC Photocell
			High Pressure Sodium S070 70W ED17 S100 100W ED17 S150 150W ED17	High Pressure Sodium 622				
			NOL No Lamp Included					

¹ Add length of arm and pole height to determine power cord length ² Medium base MH lamps only ³ 120/208/277 only

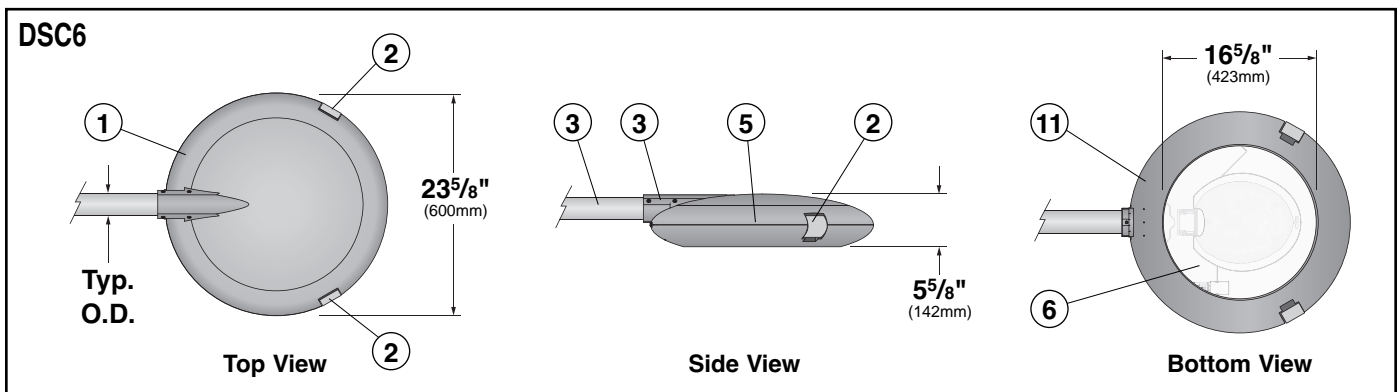

1. Luminaire Housing - Made from high pressure die-cast, low copper aluminum alloy.

2. Tool-less latch - Two tool-less steel latches for easy access to lamp chamber and maintenance.

3. Mounting Arm - Welded steel with powder coat finish.

4. Fitter - Cast fitter for direct connection to standard short and long arms.

5. Gasketing - Silicone gasket provides seal at door and glass opening.

6. Glass Lens - Tempered, screened glass lens protects and helps seal optical chamber.

7. Reflector - (not shown) Precision formed aluminum reflector with Type III distribution. Fixture is IDA-Approved™ dark sky friendly.

8. Lamp - (not shown) 70 to 150 watt T6 Metal Halide, 70 to 150 watt ED17 Metal Halide or 70 to 150 watt ED17 High Pressure Sodium.

9. Socket - (not shown) G12 base for T6 lamp or medium base socket for ED17 MH/HPS.

10. Ballast - (not shown) Electronic or magnetic ballast for Metal halide lamp, mounted to removable tray for ease of maintenance. All electrical connections are prewired. For details, consult factory.

11. Access Door - Lower casting features tempered glass lens and a stainless steel hinge that attaches to upper casting on mounting arm side. Other side is secured with tool-less latches.

Exterior Luminaire Finish - Selux utilizes a high quality Polyester Powder Coating. All Selux luminaires and poles are finished in our Tiger Drylac certified facility and undergo a five stage intensive pretreatment process where product is thoroughly cleaned, phosphated and sealed. Selux powder coated products provide excellent salt and humidity resistance as well as ultra violet resistance for color retention. All products are tested in accordance with test specifications for coatings from ASTM and PCI.

Standard exterior colors are White (WH), Black (BK), Bronze (BZ), and Silver (SV). Selux premium colors (SP) are available, please specify from your Selux color selection guide.

Selux Corp. © 2014
 TEL (845) 834-1400
 FAX (845) 834-1401
 www.selux.us
 DSC6-0914-01 (ss-v1.46)

NRTL Listed (i.e. UL, CSA)

Union Made Affiliated
 with IBEW Local 363



IP66

IK09

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.us are the most recent versions and supersede all other printed or electronic versions.


Photometry

R3 Reflector / 70W MH

Catalog # DSC6-1-H70T6-R3
Report # SX-322AB5-1

- Precision formed aluminum reflector to precisely control distribution.
- Ideal for applications demanding max. spacing.
- Maximum candela of 2471 at 72.5° from vertical.
- IES classification - Type III Full Cutoff.
- Mounting Height = 16' (4.9 m)
- IDA-Approved™ dark sky friendly.

DOWNLOAD IES FILE:
http://www.selux.us/fileadmin/us/exterior/ies_file/DSC6_IES.zip

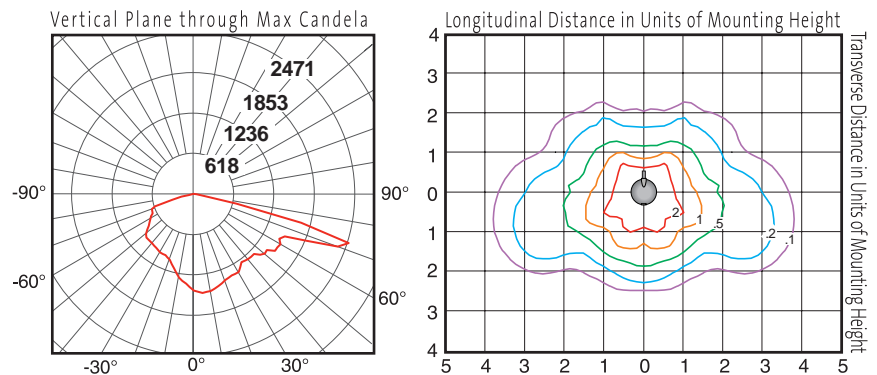


R3 Reflector / 150W MH

Catalog # DSC6-1-H150-R3
Report # SX-322AB5-2

- Precision formed aluminum reflector to precisely control distribution.
- Ideal for applications demanding max. spacing.
- Maximum candela of 5242 at 72.5° from vertical.
- IES classification - Type III Full Cutoff.
- Mounting Height = 16' (4.9 m)
- IDA-Approved™ dark sky friendly.


DOWNLOAD IES FILE:
http://www.selux.us/fileadmin/us/exterior/ies_file/DSC6_IES.zip

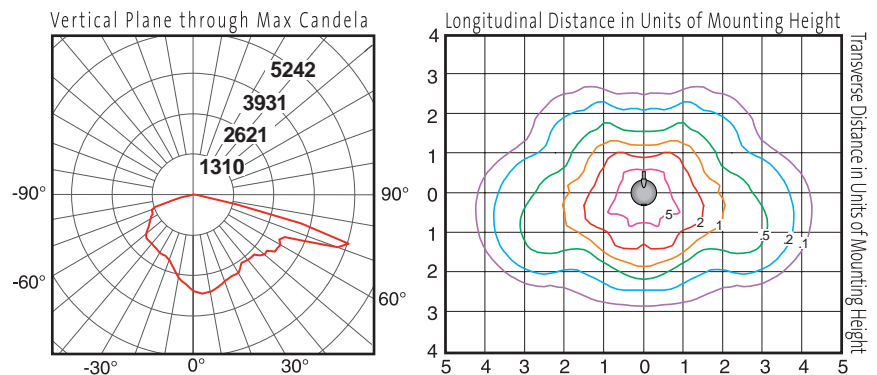


Conversion Chart	
Values based on 16' (4.9 m) mounting height.	
Mounting Height	Multiply
10' (3.0 m)	1.27
12' (3.7 m)	1.16
14' (4.3 m)	1.07
16' (4.9 m)	1.00
18' (5.5 m)	0.84

Short Arm Mounting

S1 Single Short Arm
EPA= .75 ft² (.23m²)
Weight= 26lbs. (12kg)



S2 Double Short Arm
EPA= 1.5 ft² (.46m²)
Weight= 56lbs. (25kg)




Discera 6


selux

Long Arm Mounting






LW Long Wall Mount
EPA= .85 ft² (.26m²)
Weight= 26lbs. (12kg)



L1 Single Long Arm
EPA= .85 ft² (.26m²)
Weight= 26lbs. (12kg)



L2 Double Long Arm
EPA= 1.24 ft² (.38m²)
Weight= 56lbs. (25kg)

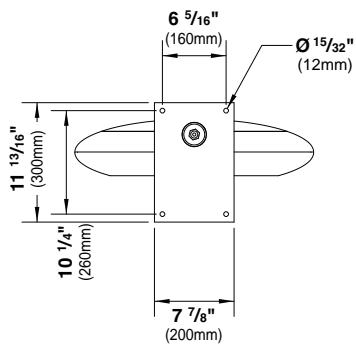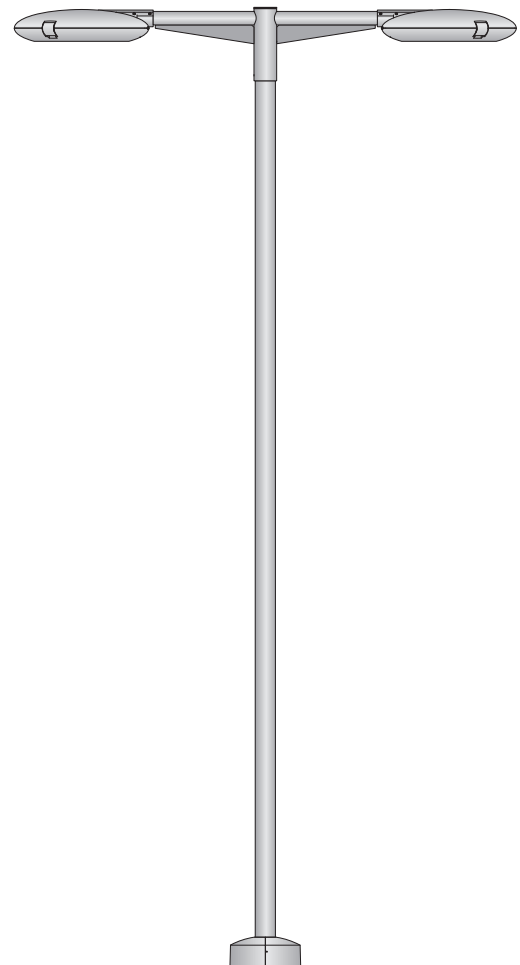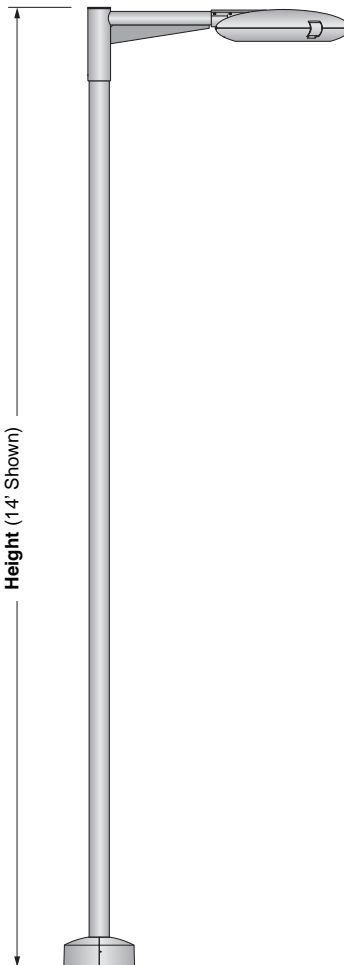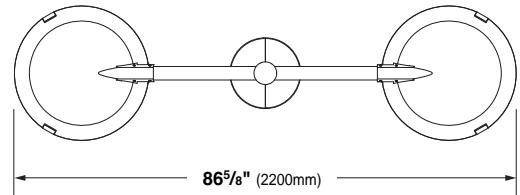

Pole Information

Refer to A35, S635, S35, AT535/635 and AT64/74 Pole specification sheets for construction details, anchorage information and additional options.




A35 & S35
Round Straight Aluminum
& Round Straight Steel Poles

S635
Round Stepped
Steel Pole


AT535/635 & AT64/74
Tapered Aluminum
Pole

Straight Poles (A35 & S35)
BC5 Standard Base Cover
Two-piece die cast aluminum

Stepped Steel Pole (S635)
BC6 Standard Base Cover
One-piece cast aluminum

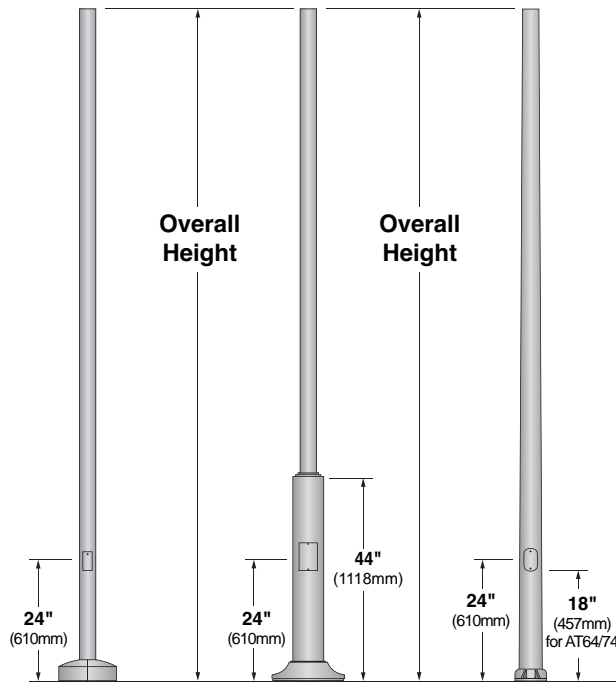


BC1 Optional Base Cover (A35 & S35)
One-piece die cast aluminum




Optional Base Covers for Tapered Poles
Die cast aluminum, two piece field installable base covers


BC3 (AT535)



BC9 (AT635 / AT64)



BC10 (AT74)



Pole Series	Bolt Circle	EPA Information (ft ²)					Height	Finish	Options
		70 mph	80 mph	90 mph	100 mph	110 mph			
S635 3 1/2" Diameter Stepped Steel Pole	9"	45.6	35.0	27.3	21.6	17.8	10 10 ft.	WH White BK Black	BC1 Die Cast Base Cover (A35 & S35 poles only)
A35 3 1/2" Dia. Straight Aluminum Pole	7 3/4"	12.4	9.3	7.1	5.4	4.3			
S35 3 1/2" Diameter Straight Steel Pole	7 3/4"	11.4	8.6	6.5	4.9	3.9			
S635 3 1/2" Diameter Stepped Steel Pole	9"	37.6	28.7	22.3	17.5	14.4	12 12 ft.	BZ Bronze SV Silver	BC3 Die Cast Base Cover (for AT535 poles only) BC9 Die Cast Base Cover (for AT64 poles only) BC10 Die Cast Base Cover (for AT74 poles only)
A35 3 1/2" Dia. Straight Aluminum Pole	7 3/4"	9.9	7.3	5.4	4.0	3.1			
S35 3 1/2" Diameter Straight Steel Pole	7 3/4"	9.1	6.7	4.9	3.6	2.8			
AT535 5" to 3 1/2" Tapered Aluminum Pole	8 1/2"	19.4	14.4	10.9	8.6	6.9	14 14 ft.	SP Specify Premium Color	REC GFCI Receptacle with weather-proof cover* T35 3 1/2" Tennon (supplied with A64 poles for arm mounting)
S635 3 1/2" Diameter Stepped Steel Pole	9"	31.7	24.2	18.6	14.6	11.9			
A35 3 1/2" Dia. Straight Aluminum Pole	7 3/4"	8.0	5.8	4.2	3.0	2.2			
S35 3 1/2" Diameter Straight Steel Pole	7 3/4"	7.3	5.3	3.8	2.7	1.9	16 16 ft.		
AT535 5" to 3 1/2" Tapered Aluminum Pole	8 1/2"	12.9	9.4	7.1	5.5	4.4			
S635 3 1/2" Diameter Stepped Steel Pole	9"	21.7	15.8	12.3	9.6	7.6			
A35 3 1/2" Dia. Straight Aluminum Pole	7 3/4"	4.9	3.2	2.2	1.4	0.8	18 18 ft.		
S35 3 1/2" Diameter Straight Steel Pole	7 3/4"	4.4	2.8	1.9	1.2	0.6			
AT535 5" to 3 1/2" Tapered Aluminum Pole	8 1/2"	10.7	7.7	5.6	4.2	3.3			
AT535 5" to 3 1/2" Tapered Aluminum Pole	8 1/2"	11.1	7.8	5.6	4.2	3.2	20 20 ft.		
AT64 6" to 4" Tapered Aluminum Pole	9 3/4"	15.7	11.5	8.7	6.9	5.5			
AT64 6" to 4" Tapered Aluminum Pole	9 3/4"	13.5	9.6	7.1	5.6	4.4			
AT74 7" to 4" Tapered Aluminum Pole	10 1/2"	20.3	15.0	11.4	9.0	7.3			

Other pole configurations available, consult factory.

Allowable EPA Calculated according to AASHTO 94 and include allowance for 1.3 gust factor.

See Mounting Configuration Pages for fixture, arm weight and EPA values.