

Project: _____ **Type:** _____ **Qty:** _____



M6I	---	---	---	---	---	---
Series	Lamp Type	Shielding	Mounting	Linear Footage	Finish	Voltage
---	---	---	---	---	---	---

Options

Series	Lamp Type	Shielding	Mounting	Linear Footage	Finish	Voltage	Options
M6I M6I Indirect Multi-Mount Form	1T5 F28T5	SD Satine Lens	C Cable	004 4 foot	WH White	120	<i>(qty)</i> EMN ¹ Stand-by Battery Pack (prefix quantity, i.e. - 5EMN) EM1 Stand-by Battery Pack (ISL-28) EM2 Stand-by Battery Pack (ISL-54) EM3 Stand-by Battery Pack (ISL-540) DM¹ Dimming (specify system) DMA¹ Digital Addressable Dimming DMH Lutron EcoSystem H-Series Dimming DM3 Lutron Hi-Lume 3D 3-wire Dimming DM4 Lutron Hi-Lume 3D 4-wire Dimming DM7 Advance: Mark 7 Dimming (0-10V) DM10 Advance: Mark 10 Dimming (2-wire) FS Single Fusing DL Suitable for Damp Locations
	1T5HO F54T5HO	OD Extra Diffuse Lens	S Swivel Stem	008 8 foot	BK Black	277	
		XX No Lens	RS Rigid Stem	012 12 foot	SV Silver	347	
				For actual lengths see following page. For other lengths, configurations indicate nominal length rounded to the next highest foot. Factory will supply layout drawings. Individual fixtures cannot be field joined.	SP Specify Premium Color		
							¹ Must be low profile ballasts (1 ³ / ₁₆ " wide x 1 ³ / ₁₆ " high); consult factory for details.

M60 Mounting Diagrams

Scale = 1 : 8

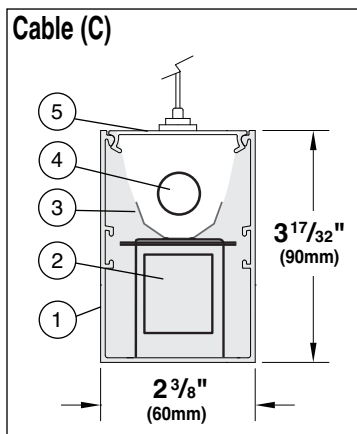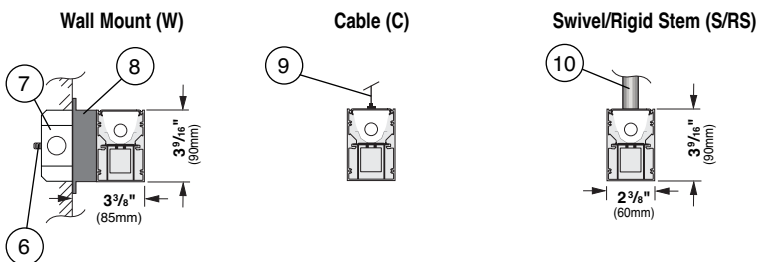

- Housing** - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long.
- Ballast** - Electronic, high power factor, class "P," type "A" sound rating. Specify 120V, 277V, or 347V. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.
- Gear Tray** - Extruded aluminum, with white painted finish. Gear tray installed as a complete electrical unit and is held in place with Keps nuts. It is fully accessible from below ceiling.
- Lamps** - As noted (by others). Other lamp lengths or wattages available; consult factory.
- Shielding** - Generation II acrylic, snap-in Satine Lens™ or Extra Diffuse Lens.
- Ø 1/4" Threaded Rod** - To anchor Wall Bracket, supplied and

installed by others.


- Outlet Box** - Supplied and installed by others. Use 2" x 4" outlet box.
- Wall Bracket** - 4" square aluminum wall bracket provided. See layout pages for details.
- 1/16" Aircraft Cable Suspension** - Supplied with chrome gripper for easy adjustment. 48" max suspension from ceiling to top of luminaire.
- 5/8" Steel Swivel Stem or Rigid Stem Suspension** - Swivel Stem provides 30° swivel rotation and can be cut in field; Rigid Stem cannot be cut in field. 48" max suspension from ceiling to top of luminaire.
- Interior Luminaire Finish** - Selux utilizes a high quality Polyester Powder Coating. All Selux luminaires are finished in our Tiger Drylac certified facility and undergo a five stage intensive pre-treatment process where product is

thoroughly cleaned, phosphated, and sealed. Selux powder coated products provide excellent salt and humidity resistance as well as ultraviolet resistance for color retention. All products are tested in accordance with test specifications for coatings from ASTM and PCI.


Standard interior colors are White (WH), Black (BK), and Silver (SV). Selux premium colors (SP) are available, please specify from your Selux color selection guide.

M60 Surface / Pendant / Wall Layout Dimensions


Nominal 4 foot individual - Top view




Nominal 8 foot individual - Top view




Nominal 12 foot individual - Top view



Typical Pendant Mount - Side View (8' Nominal individual shown)

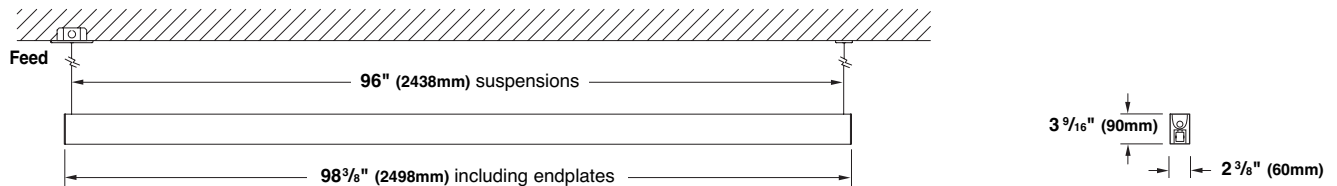

Typical Wall Mount - Top View (8' Nominal individual shown)

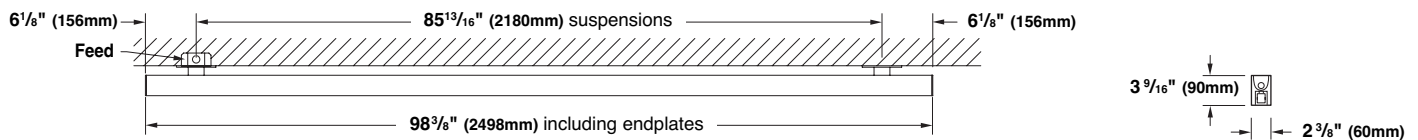

	1T5 / 1T5HO		
	Pendant Mount Including Endplates	Pendant Suspensions	Wall Suspensions
4 foot individual	50.34" (1279mm)	48.00" (1219mm)	37.84" (961mm)
8 foot individual	98.34" (2498mm)	96.00" (2438mm)	85.81" (2180mm)
12 foot individual	146.34" (3717mm)	144.00" (3658mm)	133.71" (3396mm)

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. Selux will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions please contact Selux customer service or applications engineering for assistance (1-800-SELUX-CS).