



Photometry

BW Optics / 36W LED / 4000K CCT



Catalog #: L36-1B35-40-BW-X-04-XX-UNV
 Report #: 11684969.04
 Delivered Lumens: 3193
 Input Watts: 36.65W
 Efficacy: 87
 CCT: 3896K
 CRI: 95.7

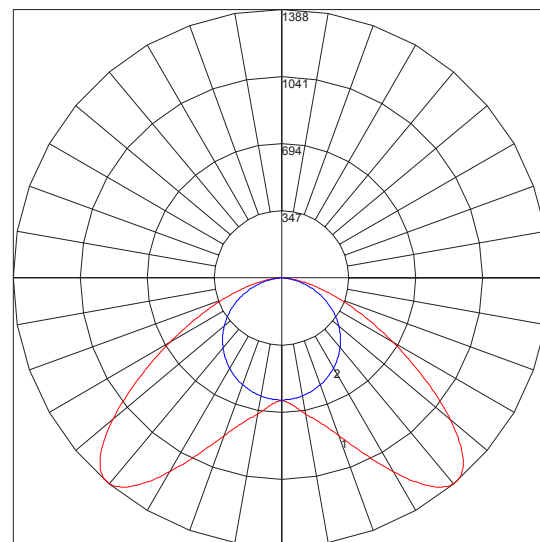

Maximum Candela = 1388 Located At Horizontal Angle = 90, Vertical Angle = 40.5
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270)
 # 2 - Vertical Plane Through Horizontal Angles (0 - 180)

L36 LED Direct Photometry Multiplier Table		
CCT Multiplier		
4000K	1.000	
3500K	0.972	
3000K	0.963	
2700K	0.931	
Light Engine Multiplier		
Light Engine	Lumens	Wattages
1B45	1.258	1.285
1B40	1.137	1.140
1B35	1.000	1.000
1B30	0.855	0.838
1B25	0.766	0.740
1B20	0.578	0.552
Lens Multiplier		
LW	1.000	
MI	1.022	
NB	1.222	
BW	1.106	

CCT multipliers apply to the photometry, IES files, and per foot values listed on page one (light engine).

Light engine and lens multipliers supplied for per foot values listed on page one (light engine).