


CATENARY

Design Guide




selux

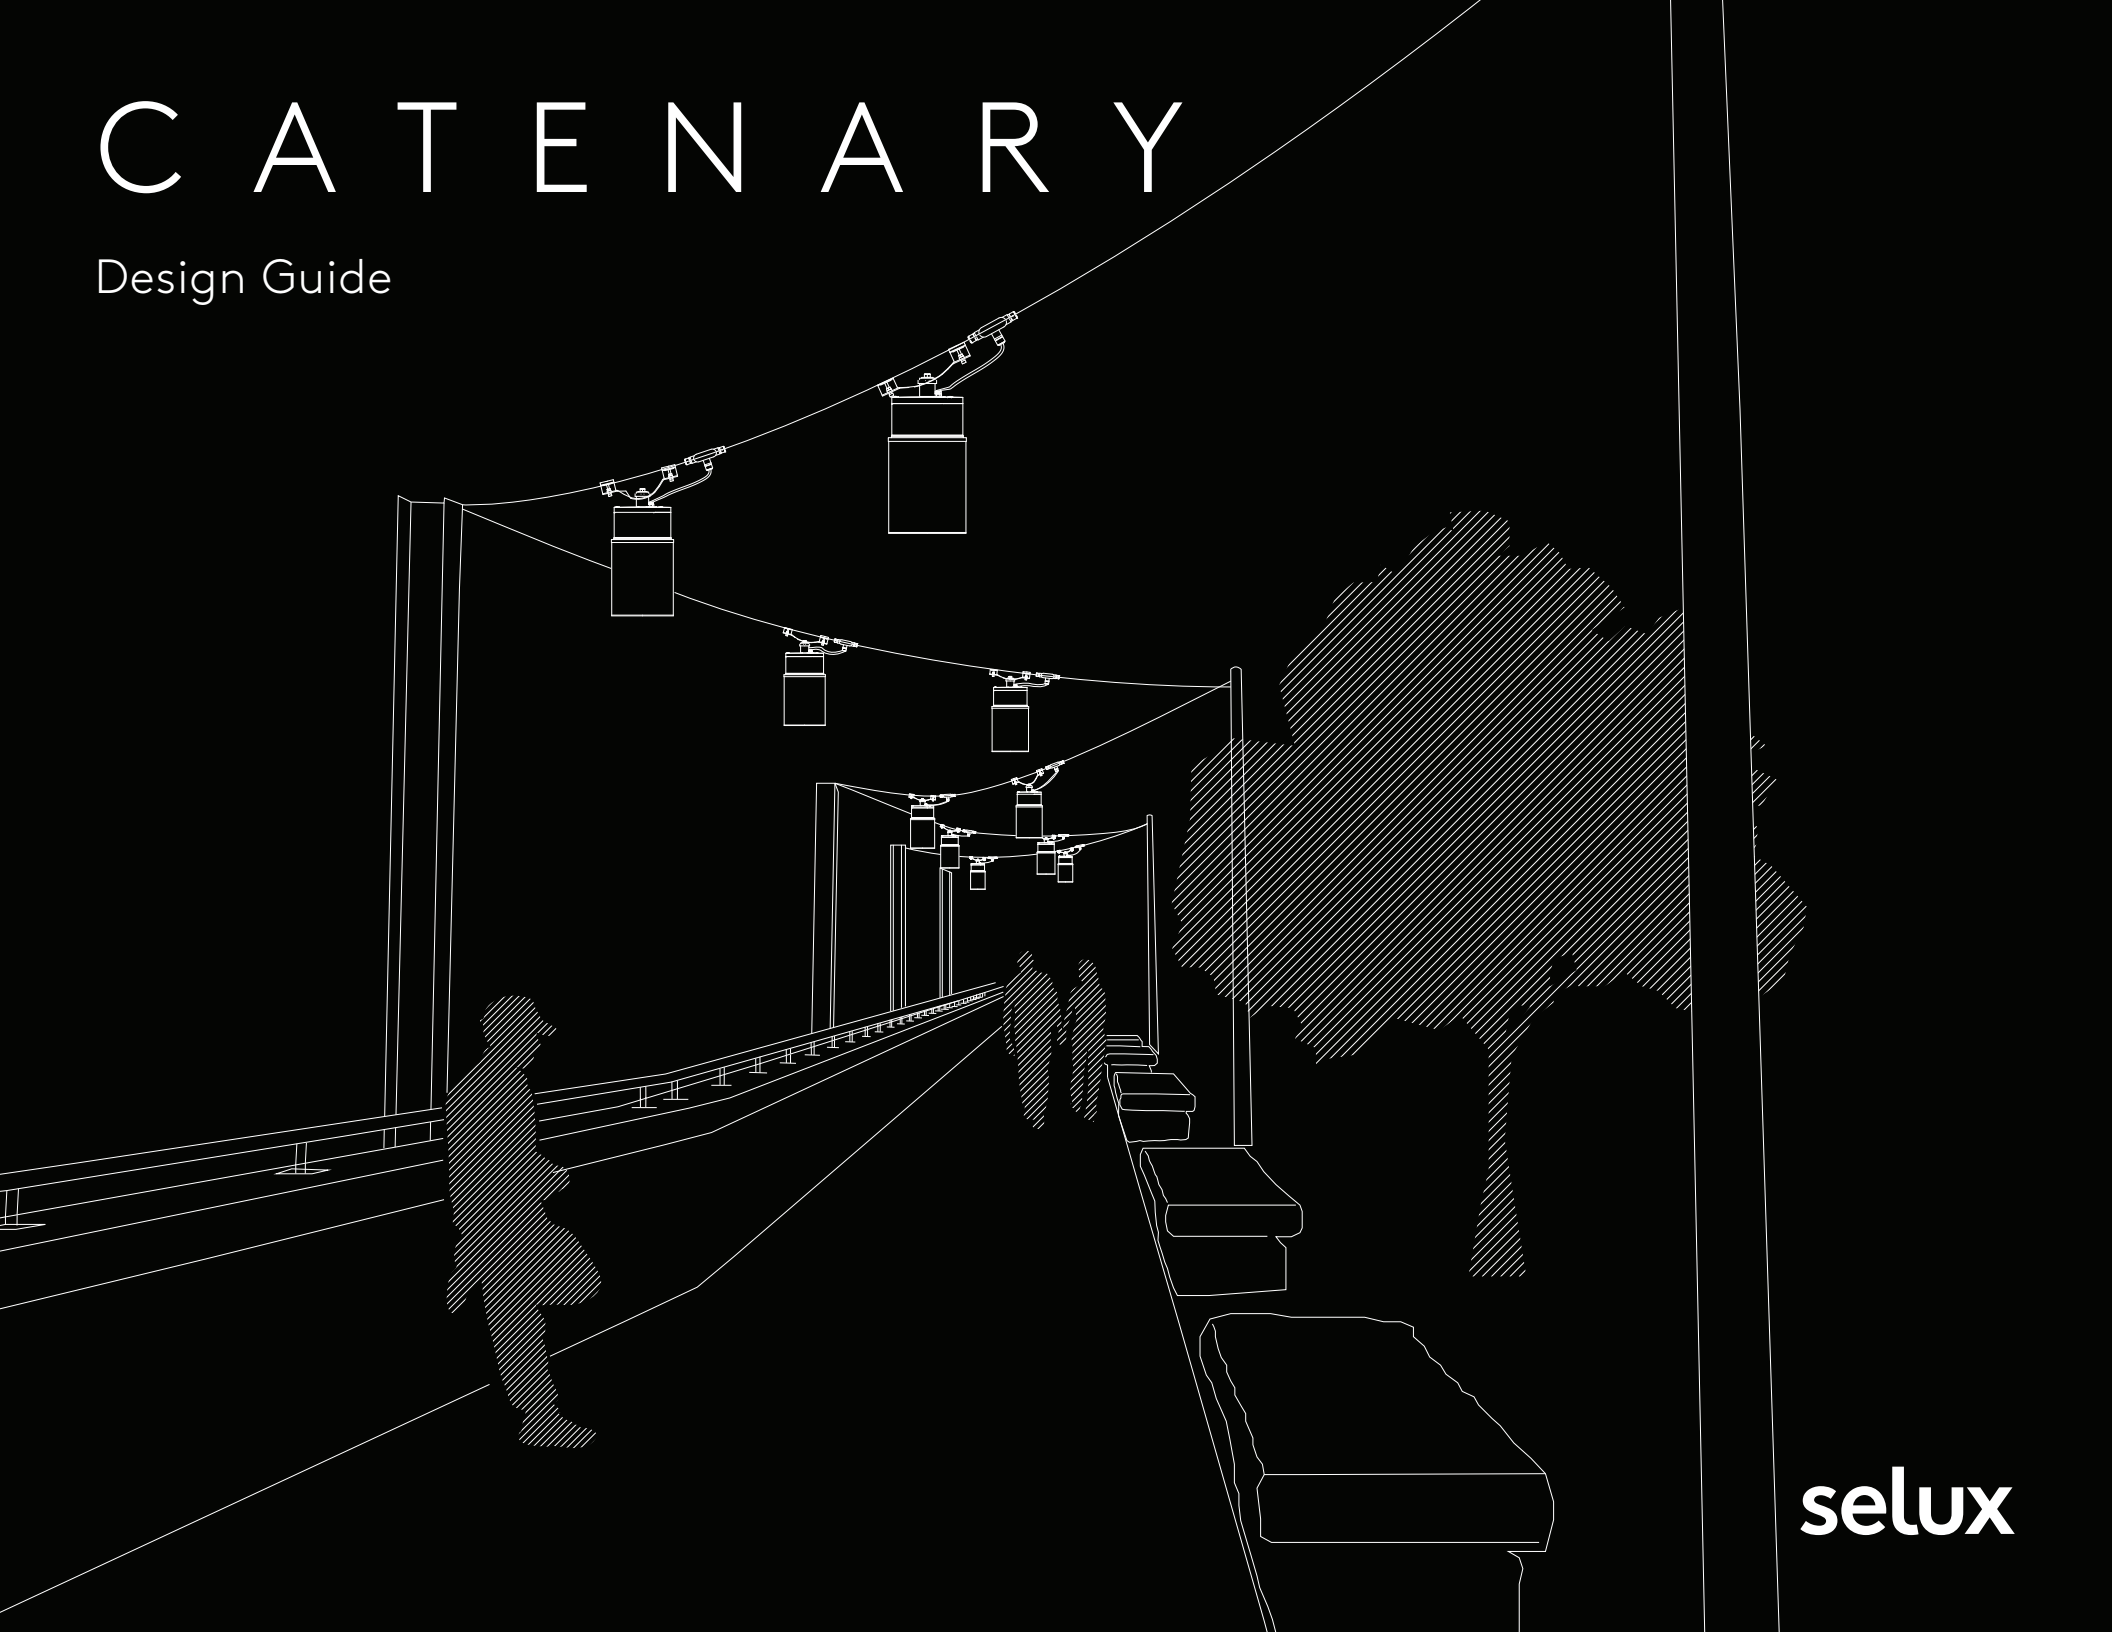

Melli™ Catenary

Melli™ is a medium scale architectural indoor/outdoor luminaire family that transforms for applications that require strict precise roadway lighting, soft diffuse light, or even focused spot distributions. With Melli™, the same form factor is implemented throughout the entire family - mix and match optics with any of the five mounting types for an aesthetically cohesive design. The Melli range excels at illuminating spaces such as plazas, shopping centers, pedestrian areas, or any space requiring high end site, facade, pendant, or catenary lighting.

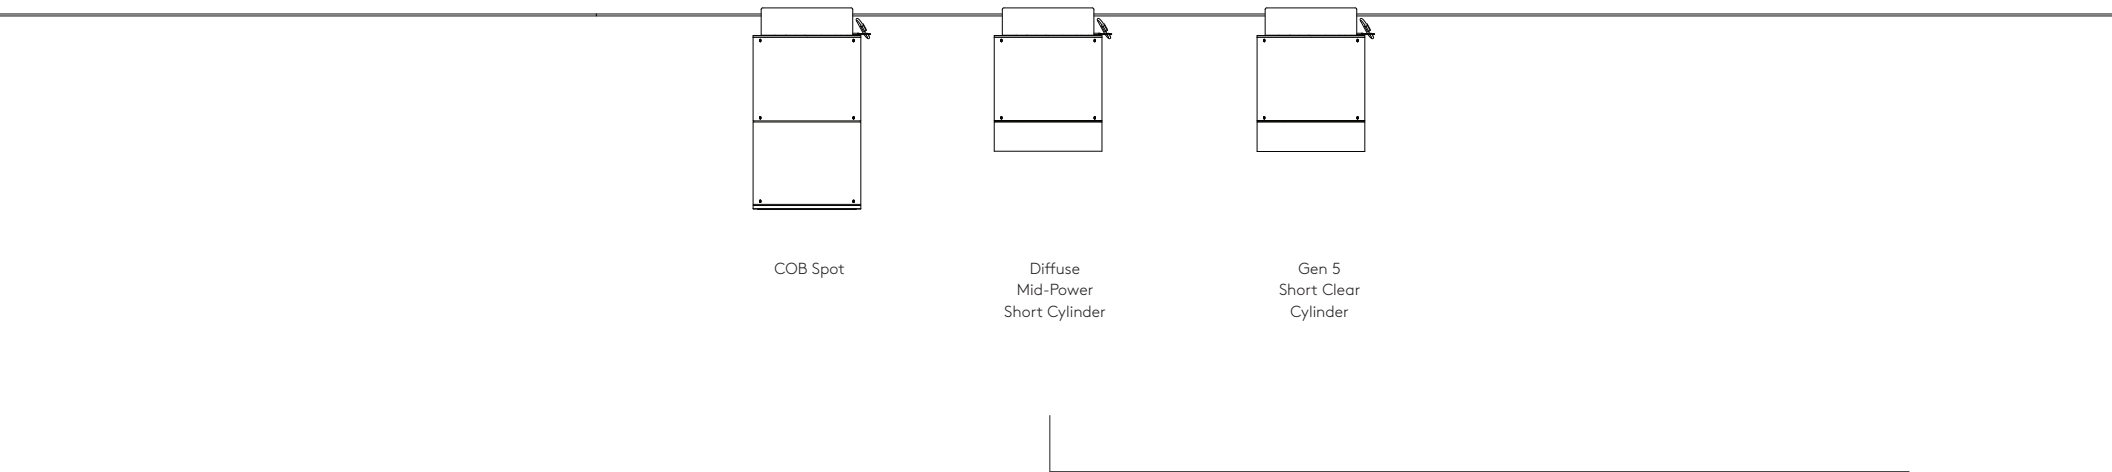

Product Specifications

| | |
|---------------|---|
| Mounting: | Catenary (for other mountings, see Melli™ Application Guide or spec sheets) |
| Light Engine: | Gen 5: Type I · Type II · Type III · Type IV · Type V round Diffuse: short diffuse · long diffuse Spot COB: spot 9° · spot 20° · flood 40° · flood 80° |
| Optics: | Gen 5: up to 3,254lm Diffuse: up to 3,362lm Spot COB: up to 2,908lm |
| CCT: | 2700K · 3000K · 3500K · 4000K · 5000K · 80CRI minimum |
| Options: | Hexagonal louver · spread lens · color filter · motion sensor · house-side shield |

**Melli™ is available in
a wide variety:**

Gen5 with short glass
Gen 5 with long glass
Diffused with short glass
Diffused with long glass
Spot COB


Refer to luminaire specification
sheet or installation instructions for
various wiring scenarios.



Lanova Catenary

Lanova by Selux is an attractive LED luminaire perfect for a designer needing improved visual guidance and purposeful light. Lanova allows you the design freedom to position the light exactly where it is required with a luminous focal point or a dramatic shadow. It creates the perfect ambiance—a modest light during the day transforms to a functional and energizing light by nightfall. Lanova creates excellent visibility and enhanced safety and security in large public areas such as parks, plazas, and campus squares.

Lanova catenary and pendant systems deliver a wide range of looks and optical options. The two optical system options include the Gen5 technical versions (Type I, Type II, Type III, Type IV, Type V Round, and Type V Square) and a diffuse ambiance version.

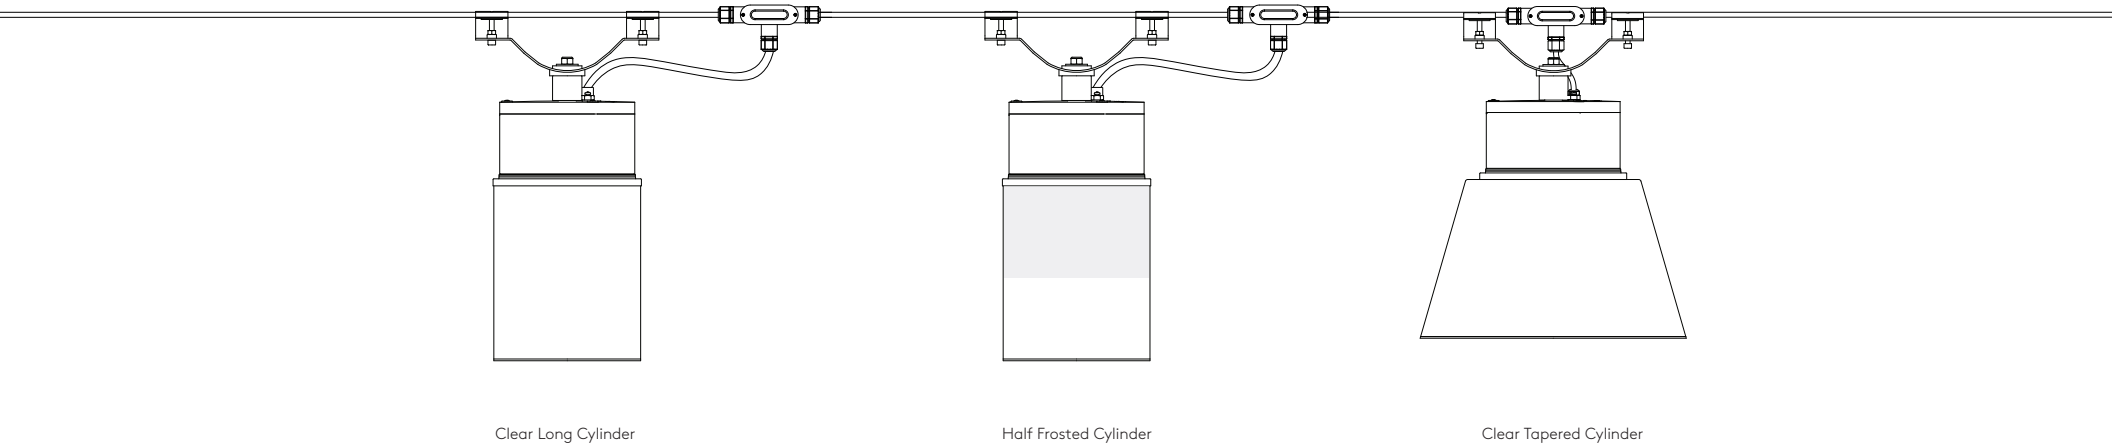

Product Specifications

| | |
|----------------|--|
| Light engine: | GEN5 |
| Output: | 1,300lm - 4,500lm nominal |
| CCT: | 3000K · 4000K · 3-Step Binning · 80+ CRI |
| Distributions: | Type I · Type II · Type III · Type III Wide · Type IV, Type V Round · Type V Square · Type V Rectangular · Diffuse Bowl |
| Options: | Dimming · Hi-Lo Switching, House Side Shield · Mid-Run Connector · Clear Long Cylinder · ½ Frosted Cylinder · Clear Tapered Cylinder |


Refer to luminaire specification sheet or installation
instructions for various wiring scenarios.



Discera Catenary

Discera Catenary is a sleek LED fixture perfect for any designer needing improved visual guidance and precise placement of light. Suspending the Discera Catenary on cables allows light to be focused where it is needed, leaving other places in shadow, creating a beautiful and dramatic effect. The recessed optics in the Discera shield the light source for more comfortable viewing. Having the choice of housing size, distribution, and output level allows the luminaire to be applied in a very tailored way.

Discera Catenary can be used to guide pedestrians, providing a sense of safety and security. Selux will work with you to engineer an elegant and unique solution for your project.

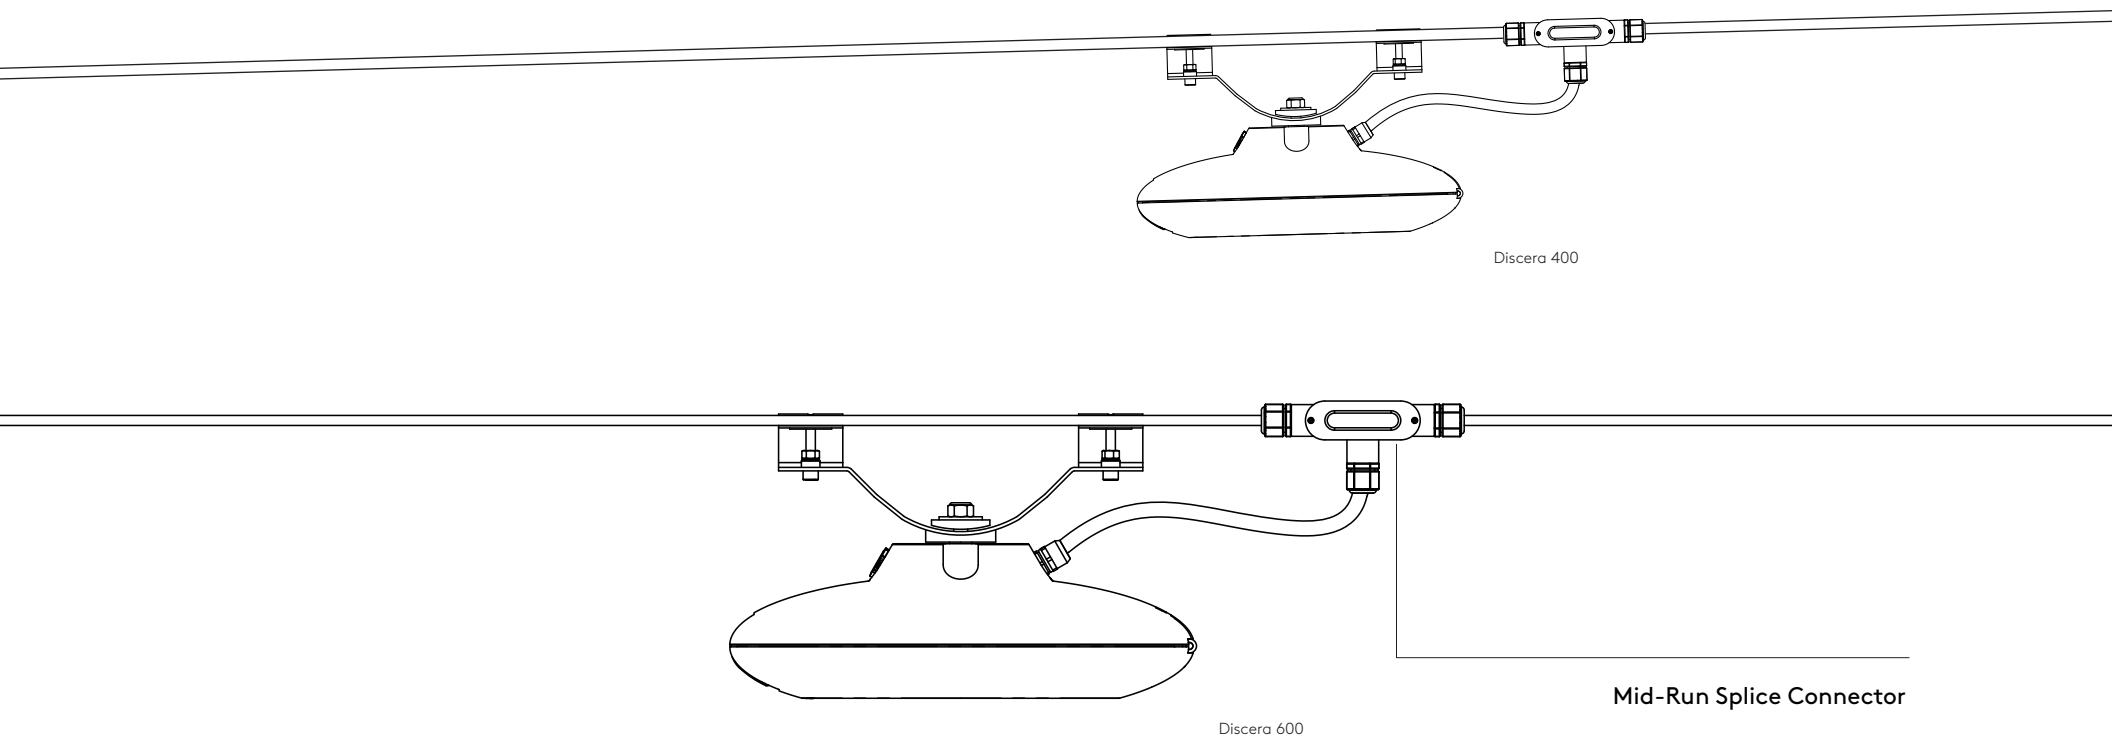

Mid-Run Splice Connector

Provided for catenary applications with multiple luminaires in a run to combine the line cords attached to the luminaires

Product Specifications

| | |
|----------------|--|
| Light engine: | GEN5 |
| Output: | 3,300lm - 13,400lm nominal |
| CCT: | 2700K · 3000K · 4000K · 3-Step Binning · 80+ CRI |
| Distributions: | Type I · Type II · Type III · Type III Wide · Type IV · Type V Round |
| Options: | Dimming · House Side Shield · Diffuse Flat Glass · Mid-Run Connector |

Refer to luminaire specification sheet or installation instructions for various wiring scenarios.

What Can Selux Provide?

Selux can offer the complete solution. By submitting a completed Catenary Design Guide Form, Selux will build a catenary package fully engineered with supporting poles, cables, cords, and luminaires. Anchoring catenary systems to buildings or structures not provided by Selux will have to be evaluated by the on-site Professional Engineer (PE).

Catenary suspended luminaires require additional materials for proper installation for the lighting system. These additional materials include structural tension cable for

luminaire suspension and fittings for attachment to the building structure or structural masts/poles and cable ends. Stainless steel is recommended due to its resistance to corrosion, strength, long life, and aesthetic appearance. Reference the luminaire weight and EPA on product specification sheet.



Westgate Oxford, Oxford, Great Britain - Photographer Tom Niven, Amphotype



Clevis Assembly & Adjustable Turnbuckles

Manual adjustment is provided by rotating the adjusting sleeve.

Stainless Steel Structural Tension Cable

Offers the best combination of strength and stiffness for static structures. As spans and loads increase, the cables get larger in diameter (the number of strands increases).



Poles & Anchor Points

Selux can provide mounting points for poles or anchored brackets to buildings or structures. Selux can provide calculations and size the poles appropriately on a project-specific basis. Brackets to structure must be evaluated by on-site PE.

Professional Engineer Stamped Drawings

Selux can provide stamped drawings (if required) for a fee. It is important to identify this at the early stages of the project so the cost can be included in the budget. Stamped drawings may extend the lead time.



*Selux does not provide structural design and engineering of building attachment or pole foundation, catenary system installation, or building cable attachment details.

General Questions

often asked



How much cable sag can be expected in a cable span?

As a rule of thumb, plan on a sag of 3% of the cable span for each cable length. For example, if you had a 33' cable span, the maximum vertical displacement, or sag would be approximately 12".



What is the typical process when requesting a budget estimate?

Once Selux has obtained all of the project information needed, it will typically take one to two weeks (dependent on design complexity) for preliminary budgets.



Is geographic location important in catenary design?

Geographic location is critical when designing your project. Wind loads and other loads factor into the cabling and pole requirements.



Ithaca Commons, Ithaca, New York








Riverfront Park, Troy, New York - HyExposure Photography


Single Wire Catenary Suspension

Pole to Pole (Type A)

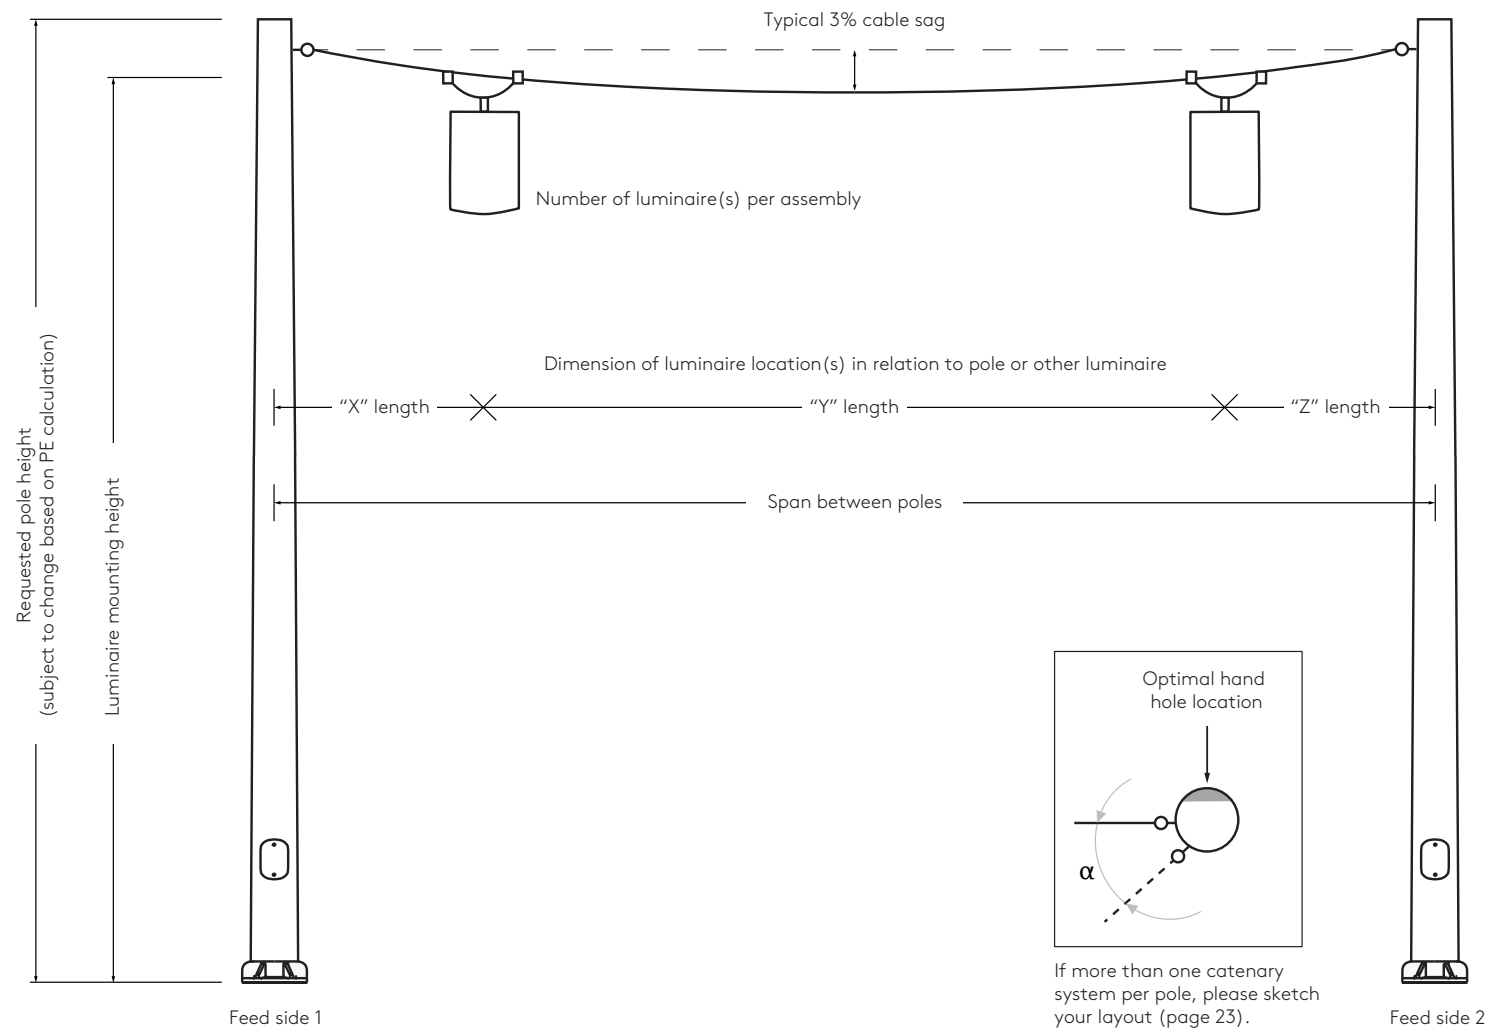


Double Wire Catenary Suspension

Pole to Pole (Type B)

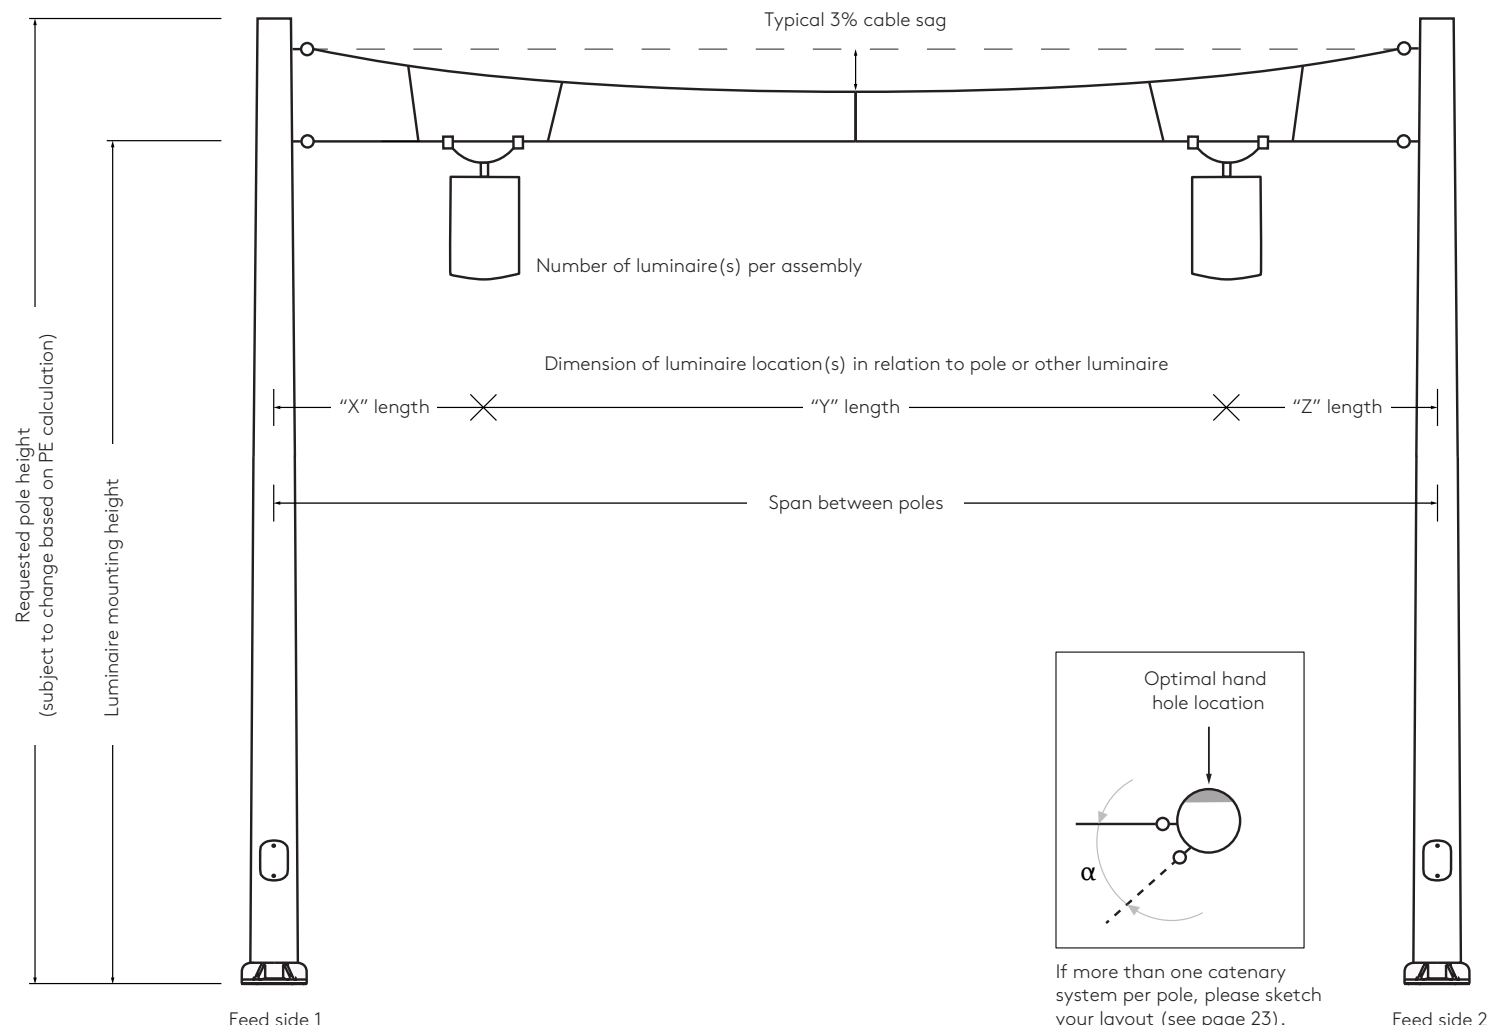


Single Wire Catenary Suspension

Wall to Wall (Type C)

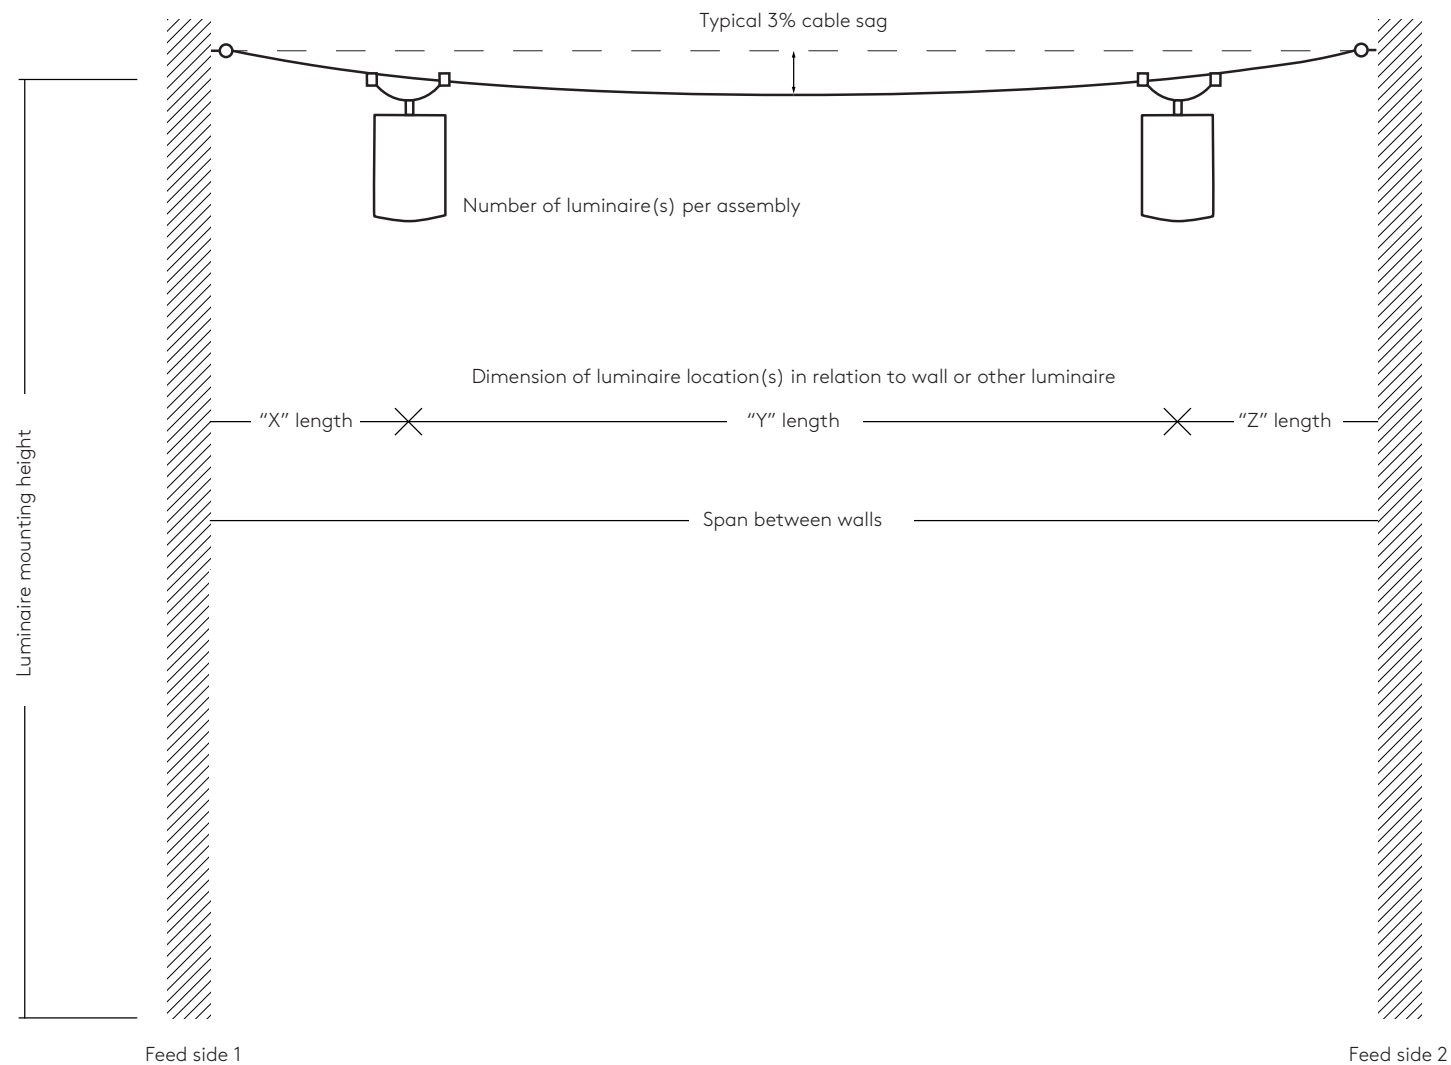


Double Wire Catenary Suspension

Wall to Wall (Type D)

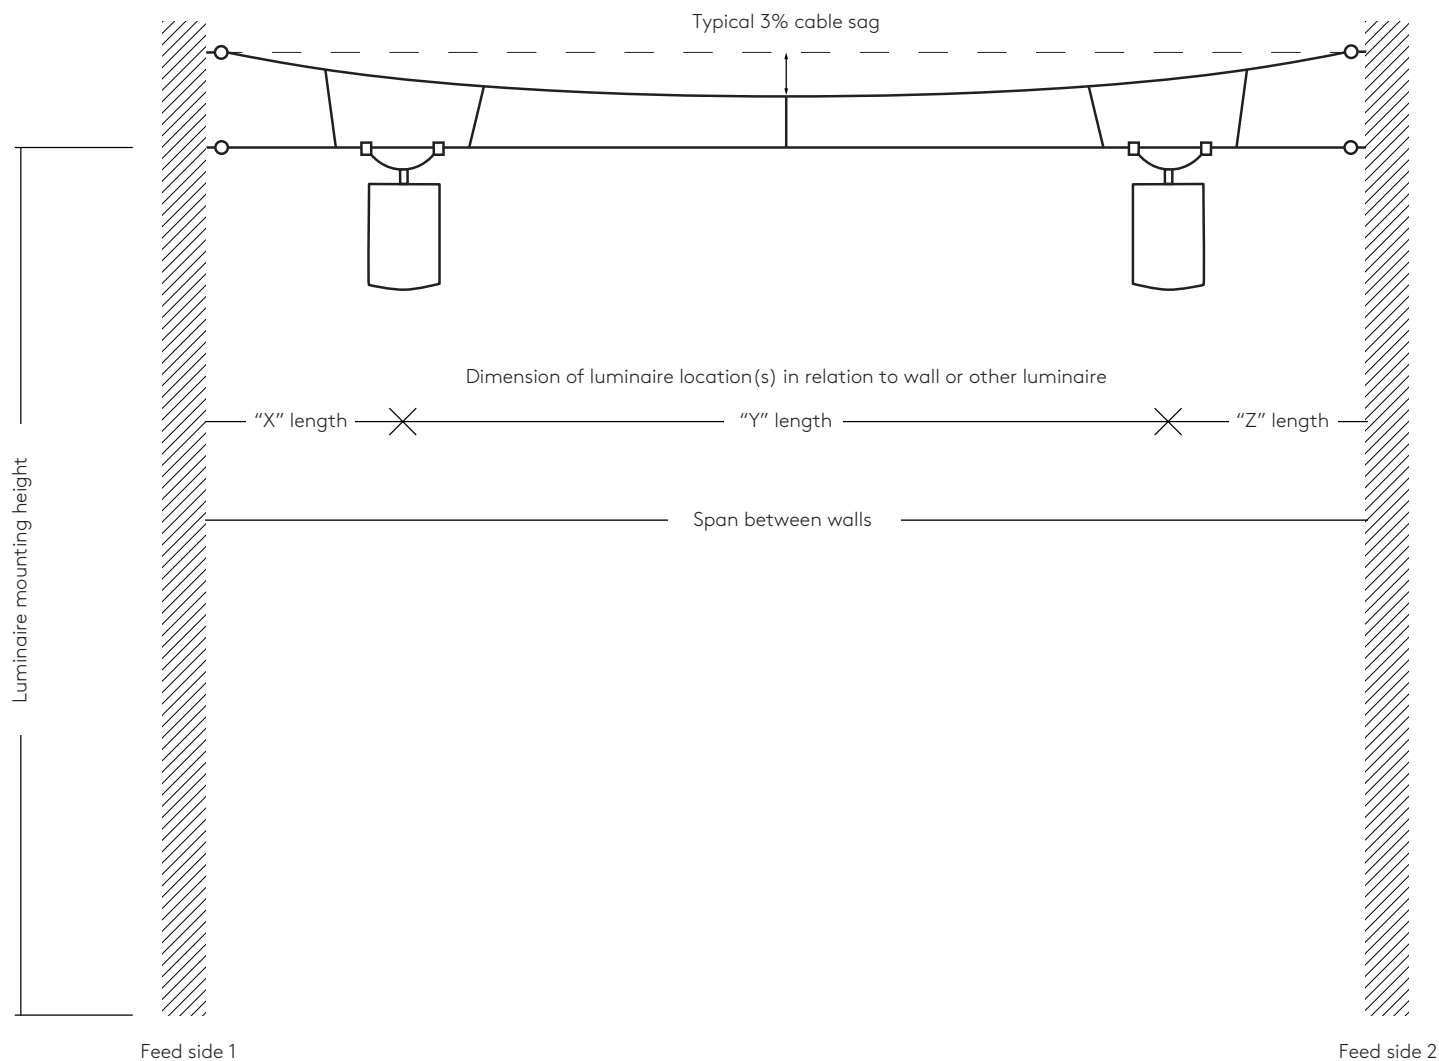


Single Wire Catenary Suspension

Pole to Wall (Type E)

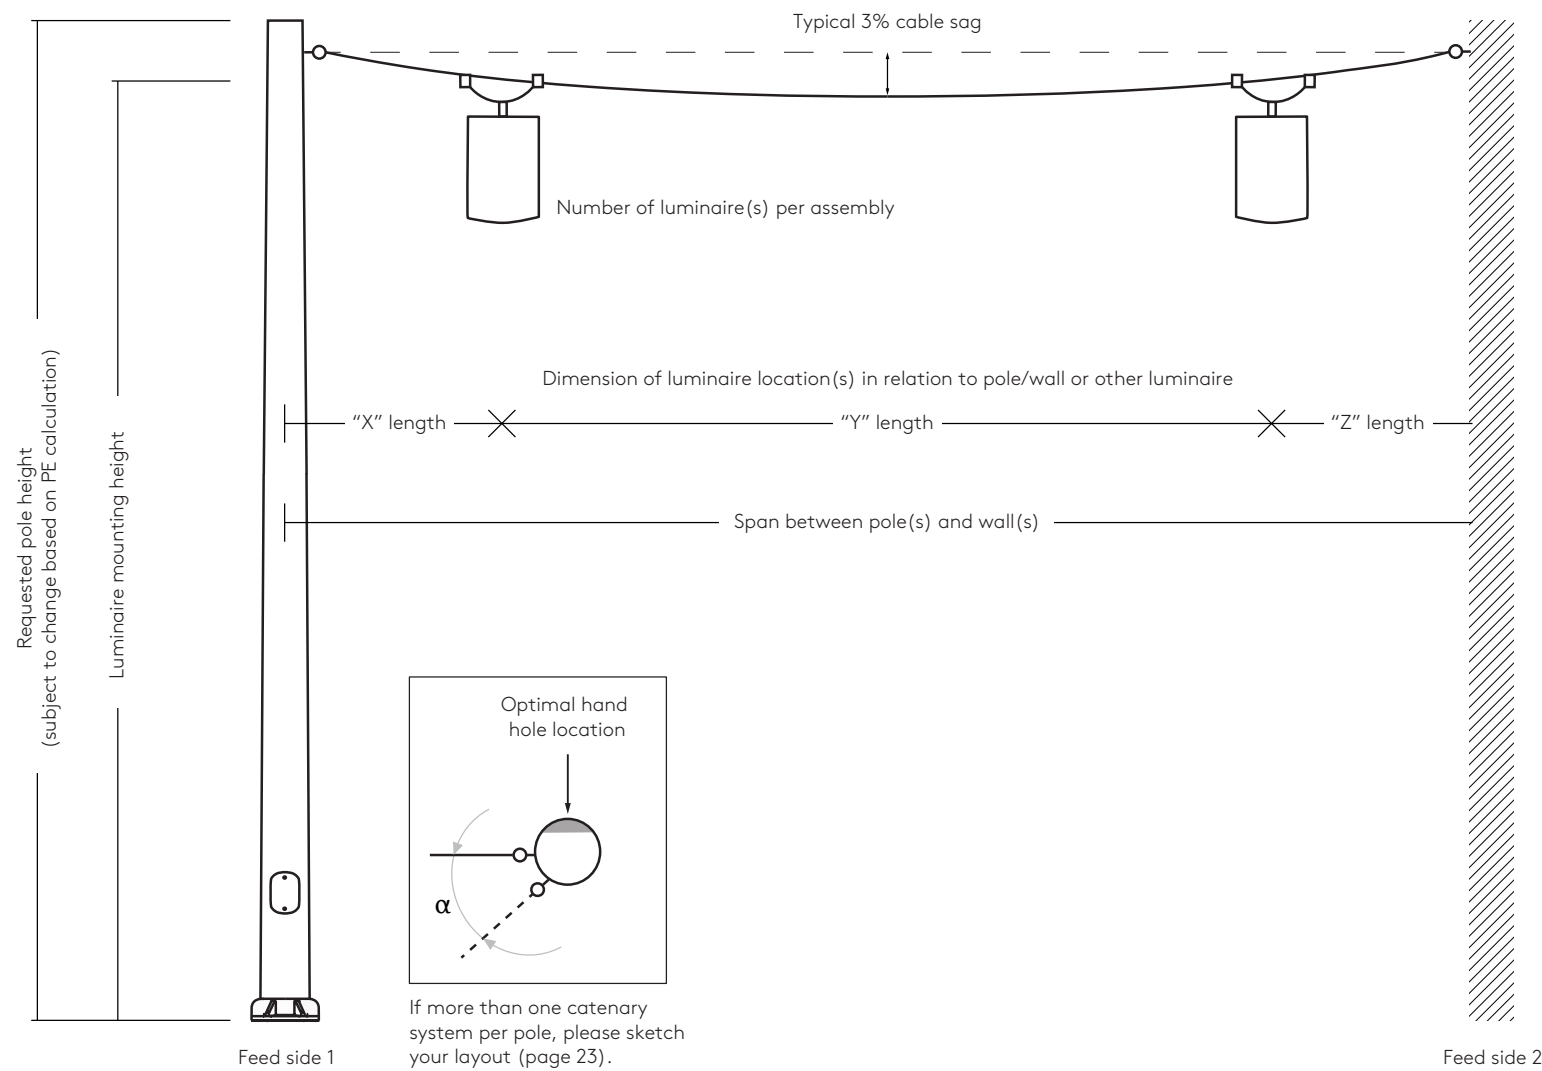


Double Wire Catenary Suspension


Pole to Wall (Type F)

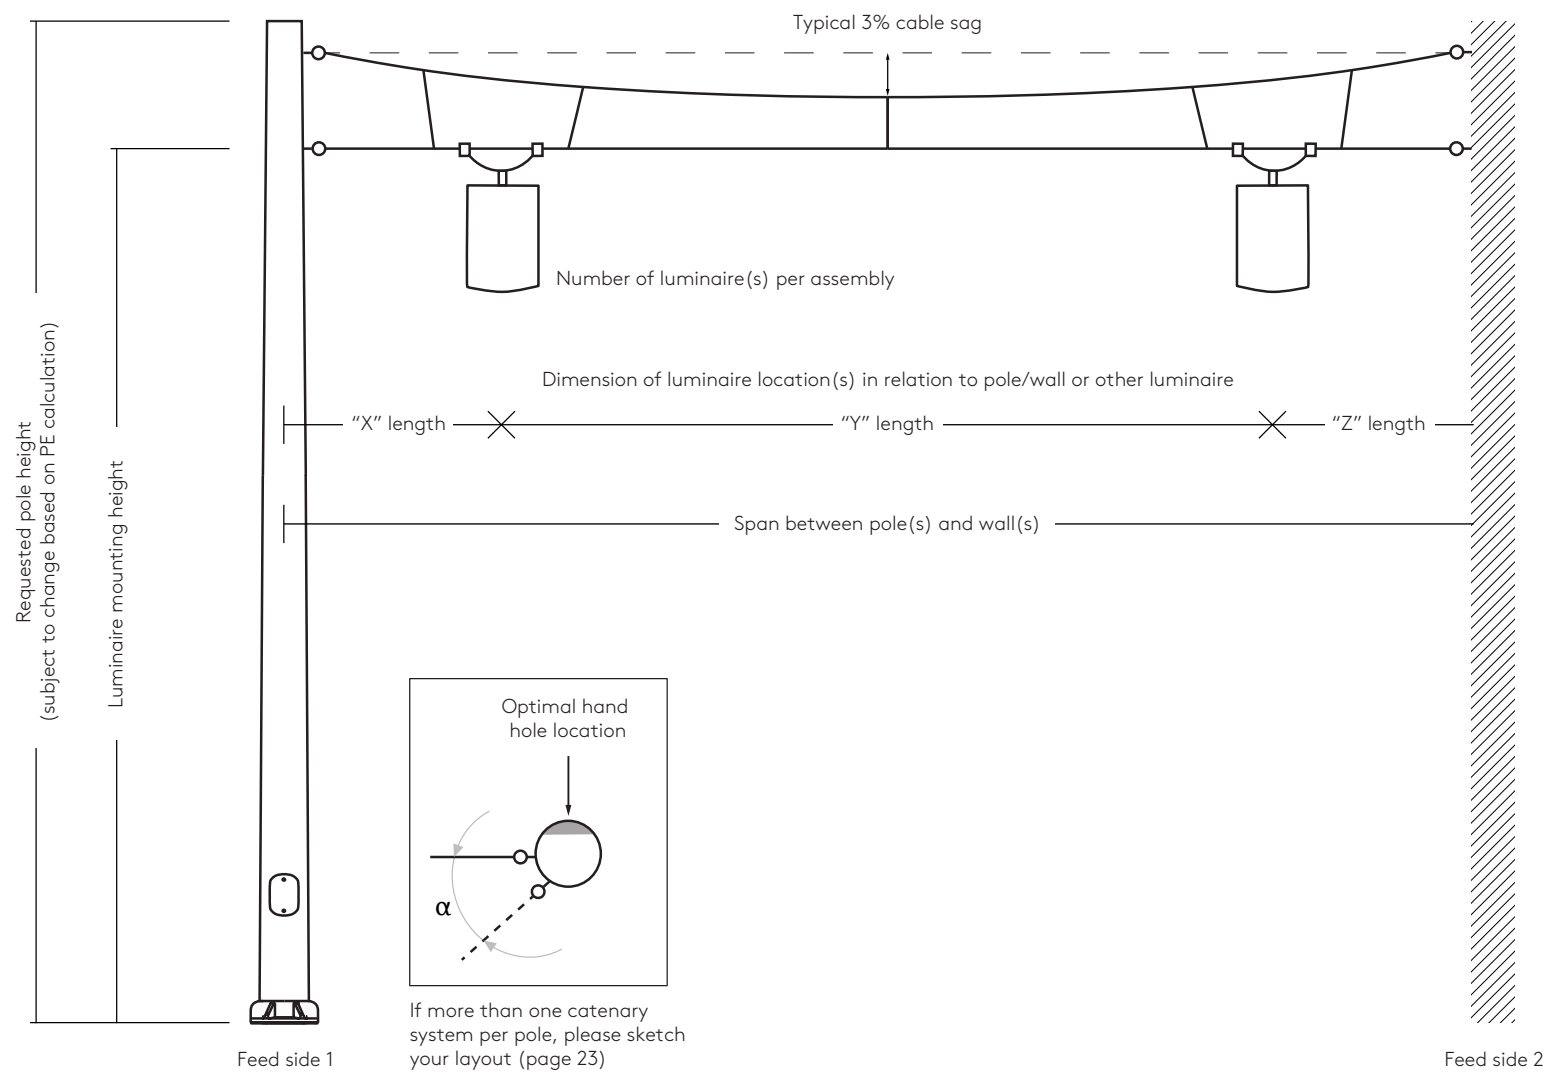

Example Pole Anchor Detail

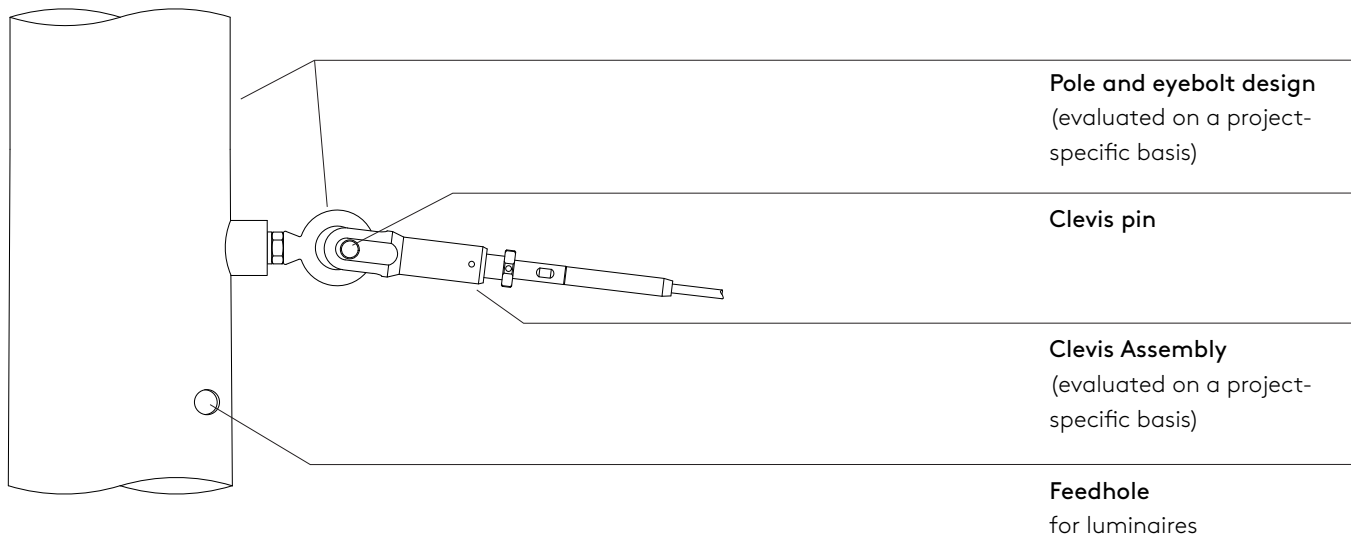

Example Wall Anchor Detail

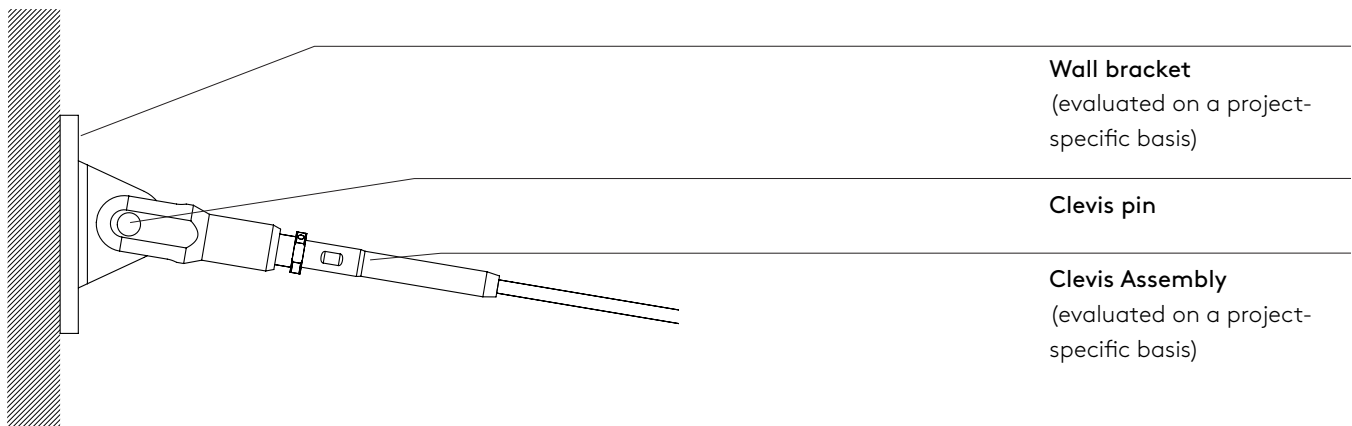




Selux will size and provide pole or wall anchor details

On a project-specific basis, Selux will size and provide pole or wall anchor details. These details are completely dependent on the catenary system and its application. To the left are generic anchor details from previous projects.



T-Mobile Call Center Facility - Kris Decker/Firewater Photography

At time of order for the catenary system,
Selux will need the following in order to
process the solution

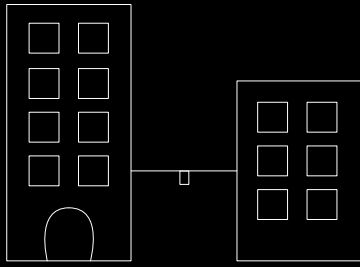

Building-to-Building Applications

- 1 Completed Catenary Design Guide request form
- 2 Confirmed site and catenary span dimensions
- 3 Expected wind speed for the project location
- 4 Relative building movements from site professional engineer – will the walls move independently from each other (how much movement) or will the building be considered as one unit?
- 5 Site Plan (CAD Required)

Building-to-Pole Applications

- 1 Completed Catenary Design Guide request form
- 2 Confirmed site and catenary span dimensions
- 3 Expected wind speed for the project location
- 4 Relative building movements from site professional engineer – will the walls move independently from each other (how much movement) or will the building be considered as one unit?
- 5 Site Plan (CAD Required)

Pole-to-Pole Applications

- 1 Completed Catenary Design Guide request form
- 2 Confirmed site and catenary span dimensions
- 3 Expected wind speed for the project location
- 4 Site Plan (CAD Required)



Lobo Rainforest, Albuquerque, NM - Photographer: Dekker/Perich/Sabatini

Catenary Design Guide Form

By submitting a completed Catenary Design Guide Form, Selux will build a catenary package fully engineered with supporting poles, cables, cords, and luminaires. Anchoring catenary systems to buildings or structures not provided by Selux will have to be evaluated on a case-by-case basis.

Date: _____ Customer: _____ Project: _____

Project location: _____ ☐ Exterior application ☐ Interior application

Catenary configuration type: _____ No. of luminaire(s) per span: _____

Dimension(s) of fixture location(s) in relation to pole: _____

Luminaire catalog #: _____ Luminaire mounting height: _____

Span between pole(s) or structure (provide dimensions): _____


Requested pole height: _____

Requested hand hole location: ☐ Optimal location ☐ Per specification: _____

Sketch Your Design

On the following page, sketch your catenary system or provide Selux with a CAD file for review and pricing purposes. If PE stamped drawing is required, please contact the factory for pricing. Confirm mounting elevation and environmental conditions at time of order. Selux to be provided with confirmed catenary span dimensions before approval drawings can be issued. Submit your catenary design to Selux Technical Support at selux.technical@selux.com or to your Regional Sales Manager.

Sketch Your Design



Publisher

Selux Corporation
5 Lumen Lane
Highland, NY 12528
www.selux.us

Edited by (responsible)

Selux Corporation

Concept and Design

Selux Corporation
www.selux.us

Print

Selux Corporation
5 Lumen Lane
Highland, NY 12528

Selux is a registered trademark of the Selux Corporation.

Errors accepted and subject to change due
to technical modifications. For conditions of sale
and delivery please refer to www.selux.us.

The use of the text and images, even in part, is
in breach of copyright without the consent of
the Selux Corporation and punishable. This also applies to
copies, translations, microfilming and processing
with electronic systems.

03/2023